




BRIDES DE SERRAGE POUR VÉRINS PIVOTANTS



KRAFTEK propose une gamme de bride standard et spécifique afin de répondre à vos besoins.


BRIDES STANDARDS

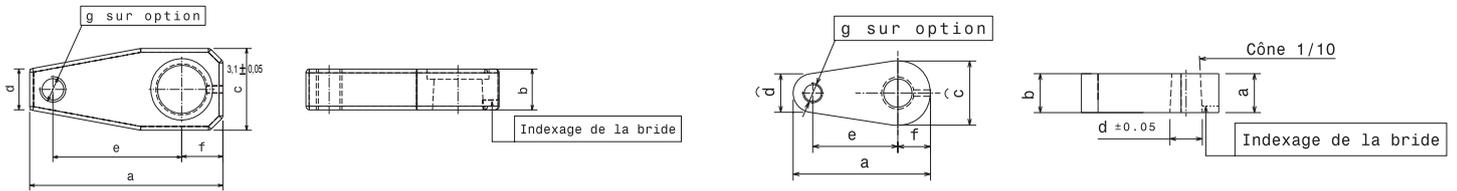

DIMENSIONS IMPLANTATIONS BRIDES								
Réf.	Ø Tige	a	b	c	d	e	f	g
BS-10-42	10	42	12	Ø20	Ø12	26	10	M6
BS-20-75	20	75	16	32	16	50	16	M10
BS-32-115	32	115	23	48	22	75	25	M16
BS-40-140	40	140	28	60	28	95	30	M16
BS-50-178	50	178	34	78	40	120	40	M20

OPTIONS			
Réf.	Indexée	Taraudée	Indexée /Taraudée
Ø 10		BS-10-42-T	
Ø 20	BS-20-75-Z	BS-20-75-T	BS-20-75-Z-T
Ø 32	BS-32-115-Z	BS-32-115-T	BS-32-115-Z-T
Ø 40	BS-40-140-Z	BS-40-140-T	BS-40-140-Z-T
Ø 50	BS-50-178-Z	BS-50-178-T	BS-50-178-Z-T


BRIDES ÉTAGÉES

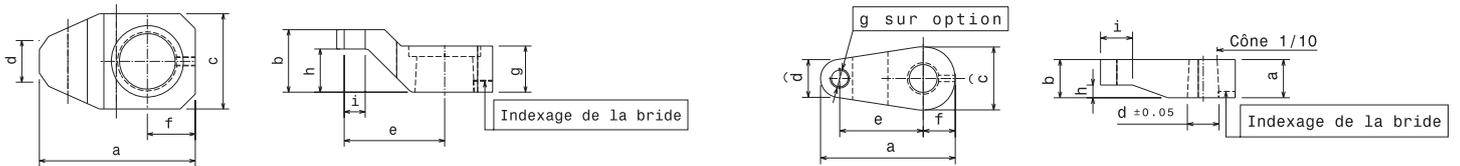

DIMENSIONS IMPLANTATIONS BRIDES										
Réf.	Ø Tige	a	b	c	d	e	f	g	h	i
BE-10-42	10	42	12	Ø20	Ø12	26	10	/	4	10
BE-20-52	20	52	21	32	14	33,5	16	15,5	14,5	7
BE-32-78	32	76	28	46	25	50	23	22,5	19	7
BE-40-100	40	100	34	66	39	64	33	28	23	7
BE-50-123	50	123	40	75	39	82,5	37,5	34	27	8

OPTIONS			
Réf.	Indexée	Taraudée	Indexée /Taraudée
Ø 10		BE-10-42-T	
Ø 20	BE-20-52-Z	BE-20-52-T	BE-20-52-Z-T
Ø 32	BE-32-76-Z	BE-32-76-T	BE-32-76-Z-T
Ø 40	BE-40-100-Z	BE-40-100-T	BE-40-100-Z-T
Ø 50	BS-50-123-Z	BE-50-123-T	BE-50-123-Z-T

BRIDES PALONNÉES

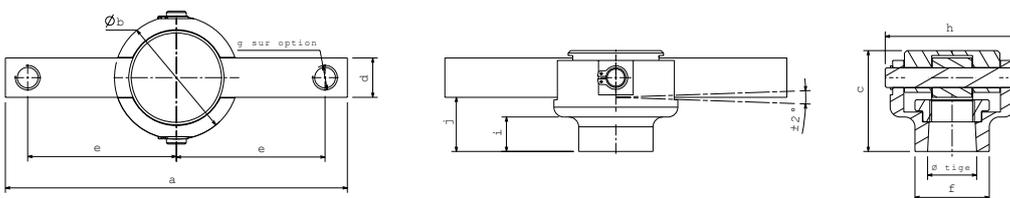

DIMENSIONS IMPLANTATIONS BRIDES											
Réf.	Ø Tige	a	b	c	d	e	f	g	h	i	j
BP-10-72	10	72	25	33	12	30	20	M6	27	12	21
BP-20-132	20	138	50	41	16	60	30	M10	54	14	22
BP-32-196	32	196	60	48	22	83	40	M16	64	14	29
BP-40-216	40	216	80	54	28	92	60	M16	84	14	35
BP-50-236	50	236	100	60	40	100	70	M20	104	14	41

OPTIONS	
Réf.	Taraudée
Ø 10	BP-10-72-T
Ø 20	BP-20-138-T
Ø 32	BP-32-196-T
Ø 40	BP-40-216-T
Ø 50	BP-50-236-T