




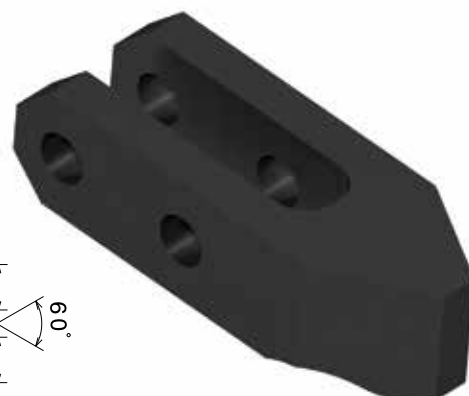


BRIDES DE SERRAGE POUR VÉRINS BASCULANTS

Bride basculant standard pour VHDE-xx-x-B

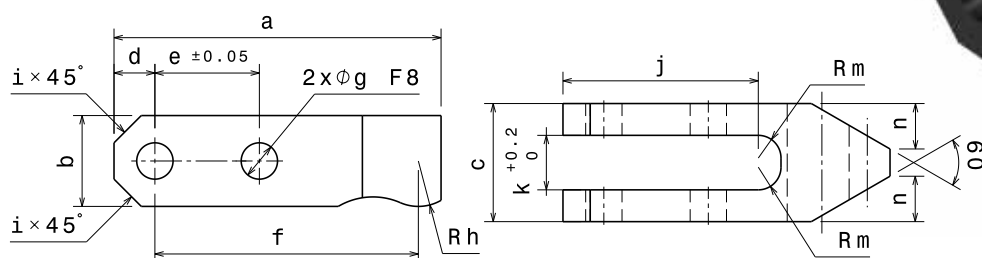

Bride basculant standard rectangulaire pour VHDE-xx-x-B

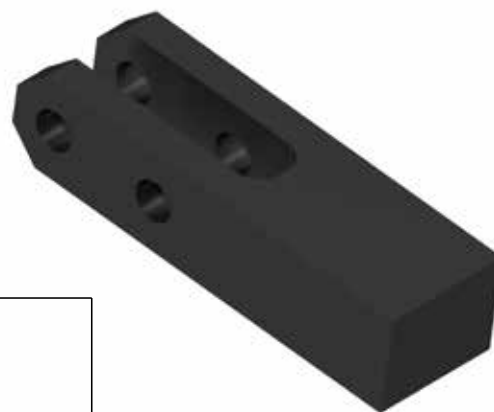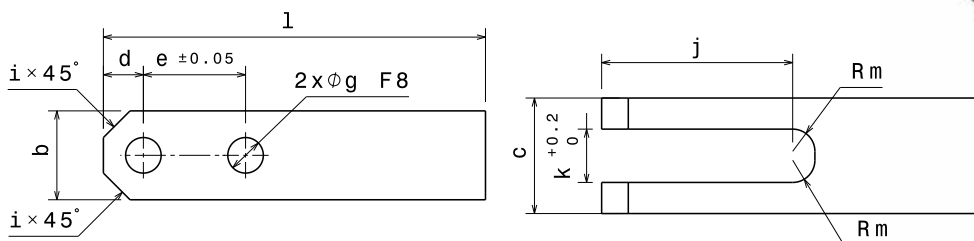

Réf.	a	b	c	d	e	f	Øg	Rh	i × 45°	j	k	l	Rm	n
BB-10	53	12	18	5	18	45	Ø5	R6	3 × 45°	30	8		R3	8
BB-10-R		12	18	5	18		Ø5		3 × 45°	30	8	64	R3	
BB-20	72	20	26	9	23	58	Ø8	R10	6 × 45°	43	12		R5	10
BB-20-R		20	26	9	23		Ø8		6 × 45°	43	12	86	R5	
BB-32	110	30	34	15	35	88	Ø12	R12	8 × 45°	65	17		R6	13
BB-32-R		30	34	15	35		Ø12		8 × 45°	65	17	123	R6	