



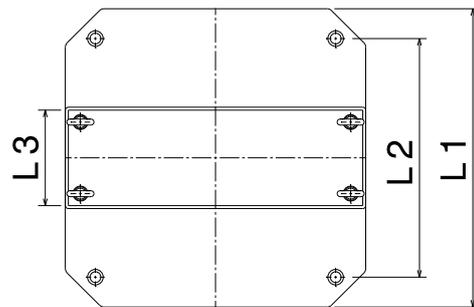

Caractéristiques :

- Tour moulée stabilisée et pré-usinée en aluminium ou fonte
- Tour équipée d'une plaque de fermeture et de 4 anneaux

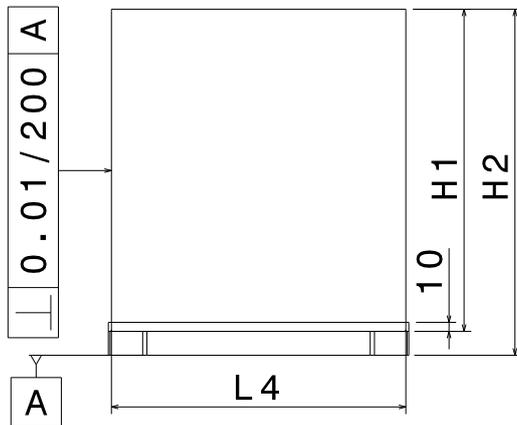

Matière	Alu AS7		Fonte FGL 250	
L1 (mm)	400	500	400	500
L2** (mm)	300	400	300	400
L3 (mm)	120	160	120	160
L4 (mm)	400	500	400	500
H1 (mm)	480	540	480	540
H2 (mm)	515	580	515	580
Poids (kg)	70	95	200	271
Références				
	SB.2.A.480.400	SB.2.A.545.500	SB.2.F.480.400	SB.2.F.545.500

** Côte pouvant être modifiée sur demande